



To compliment the MicroFlex range of flexible, durable IP67 linear systems, a range of mounting options are available which provide mounting solutions for all installation types. The range includes serrated, non-serrated, flexible and rigid as well as a mounting clips for challenging locations. Each mounting profile is designed to ensure secure installation of the MicroFlex system on site.



Serrated Aluminium
Surface Mount (Rigid)

Refer Page 2



Serrated Aluminium
Surface Mount (Flexible)

Refer Page 3





Serrated Aluminium
Recessed Mount (Rigid)

Refer Page 4

Serrated Aluminium - Surface Mount (Rigid)



Used for upside down or long vertical runs.
For use with both side lit and front lit HaloFlex.

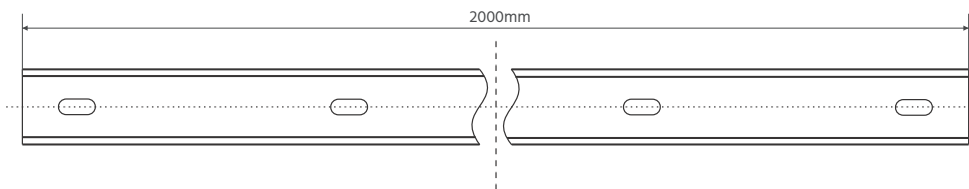


Product	Standard Length	Slotted Hole	Hole Number
MFL-MPF-SFC-SRA-0020	20mm	4mm x 10mm	1
MFL-MPF-SFC-SRA-2000	2000mm	4mm x 10mm	10

Serrated Aluminium - Surface Mount (Flexible)



Used for upside down or long vertical runs.
Suitable for use with side lit only.

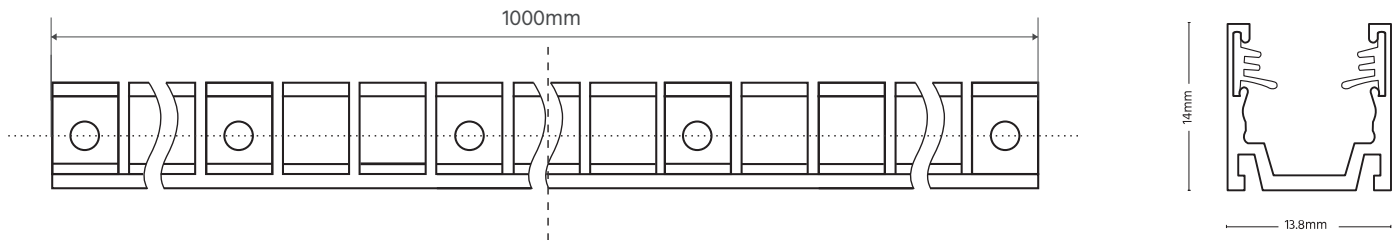


Product	Standard Length	Screw Hole	Hole Number
MFL-MPF-SFF-SRA-1000	1000mm	Ø4.2mm	10

Serrated Aluminium - Recessed Mount (Rigid)



Used for upside down or long vertical runs.
For use with both side lit and front lit HaloFlex.

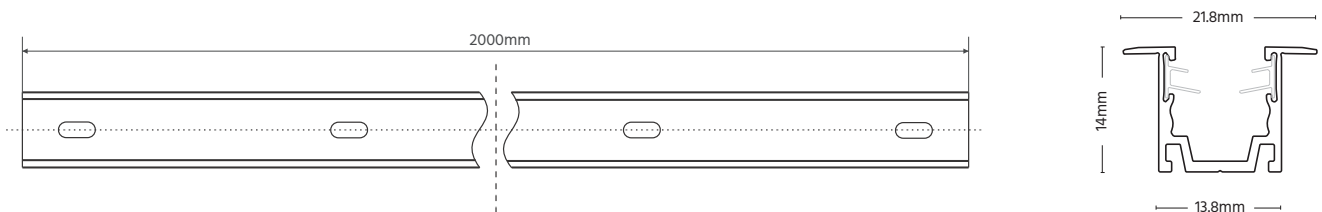

Product	Standard Length	Screw Hole	Hole Number
MFL-MPF-REC-SRA-2000	2000mm	4mm x 10mm	10